

## ORDERING GUIDE: DISTRIBUTORLESS TYPE SYSTEMS (COIL PACK/COILS)

### A) IGNITION LEAD ORDER DETAIL

Please complete in **BLOCK CAPITALS**

Your Name: \_\_\_\_\_

Address: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Zip Code: \_\_\_\_\_

Tel: \_\_\_\_\_

Fax: \_\_\_\_\_

Mobile: \_\_\_\_\_

#### LEAD TYPE REQUIRED (please tick ✓)

Copper Core (Black / Unprinted)

7mm

**If unsure, please**

Electrosports 70 (Black)

7mm

**refer to:**

Electrosports 80 (Blue)

8mm

**www.magnecor.com**

Competition KV85 (Red)

8.5mm

**for cable (lead in UK)**

R-100 Racing (Red)

10mm

**descriptions and specifications.**

#### YOUR VEHICLE DETAILS


Vehicle Make/Model: \_\_\_\_\_ Year: \_\_\_\_\_

Engine Type: E.g. Honda Civic 1.6 \_\_\_\_\_

Engine Code: E.g. B16A2 \_\_\_\_\_

### B) COIL PACK TYPES - Four Cylinder Examples (please tick)


*Ford 1st Generation  
(With Hook Type Connector)*



Boot Type

90° (compulsory)

*Ford 2nd Generation  
or Valeo/Sagem/Bosch/  
Vauxhall/Opel etc.*




Boot Type

90°  Straight

**Now go to Section D)**

*Valeo/Sagem/Bosch/  
Vauxhall/Opel etc.*




Boot Type

90°  Straight

**Now go to Section D)**


*Electromotive Ignition Etc.*



Boot Type

90°  Straight

*Other-Please Sketch*



Boot Type:  90°  Straight

*For Singular type coils  
e.g. Mercury Outboard/Bosch  
Complete Section D) above*

### MEASURING YOUR LEADS CORRECTLY

PLEASE READ CAREFULLY TO ENSURE MEASUREMENTS ARE CORRECT.


When measuring existing ignition leads, measure from the spark plug metal terminal end to the distributor or coil metal terminal end (see diagram 1). For leads with deep boots (e.g. 16 valve engines) measure from the centre (see diagram 2). It is best to remove ignition leads from the spark plugs before measuring if the leads are difficult to reach.

Use a dressmaker's tape or alternatively lay a flexible tube/covered wire against the existing ignition lead. These can then be easily measured after the length has been established. This is the most accurate way to arrive at the correct lead lengths.

If no ignition leads are fitted to the engine, establish length by using tubing pipe or covered wire/flex or old ignition leads to make a temporary connection from the distributor to the spark plugs. Using this method will also help ascertain the best possible lead position along the entire length of the proposed ignition lead routing.

When measuring the R-100 10mm leads in particular, remember to take into account that the physical bulk of the 10mm ignition lead might necessitate longer lead lengths in order to go around corners and accessories. Also, fitting R-100 10mm ignition leads into original equipment tubes and brackets may not be possible. However, due to its exceptional flexibility the lead will squeeze into many aftermarket 8mm or larger lead separators.

**C) CAPACITY:** \_\_\_\_\_ **NUMBER OF CYLINDERS:** \_\_\_\_\_  
**SOHC/DOHC:** \_\_\_\_\_ **NUMBER OF VALVES:** \_\_\_\_\_  
**TURBO**  **S/CHARGED:**  **CARB**  **INJECTION:**

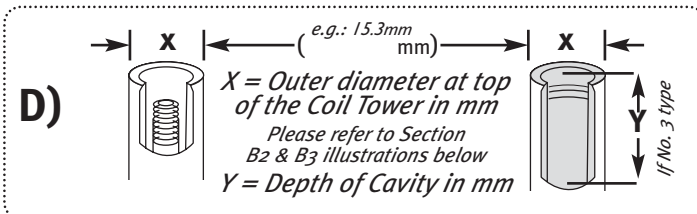

**Fax this sheet and any other information to:**  
**(USA) 248-471-9506 or attach it to an email with any**  
**photographs etc. to: mag@magnecor.com**

Diagram 1. (please tick if used ✓)


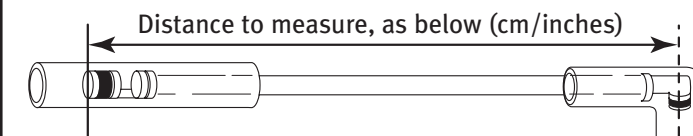


Diagram 2. (please tick if used ✓)

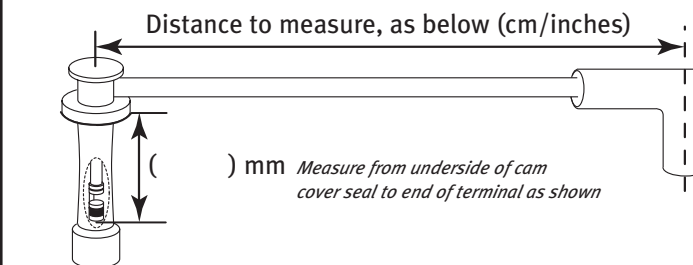

**OTHER RELEVANT INFORMATION:** E.g. Specific Conversion Type

**SPARK BOOT PLUG REQUIRED** (please see reference images below)

Standard (Black)

High Temperature (Red)

**SPARK PLUG LEAD LENGTHS** (cm / inches)

(Cylinder Numbers)

1) \_\_\_\_\_ 2) \_\_\_\_\_ 3) \_\_\_\_\_ 4) \_\_\_\_\_  
5) \_\_\_\_\_ 6) \_\_\_\_\_ 7) \_\_\_\_\_ 8) \_\_\_\_\_  
9) \_\_\_\_\_ 10) \_\_\_\_\_ 11) \_\_\_\_\_ 12) \_\_\_\_\_

